



| FortiAuthenticator™

User Identity Management and Single Sign-On




Enterprise Network Identity Policy

Network and Internet access is key for almost every role within the enterprise; however, this requirement must be balanced with the risk that it brings. The key objective of every enterprise is to provide secure but controlled network access enabling the right person the right access at the right time, without compromising on security.

Fortinet Single Sign-On is the method of providing secure identity and role-based access to the Fortinet connected network. Through integration with existing Active Directory or LDAP authentication systems, it enables enterprise user identity based security without impeding the user or generating work for network administrators. FortiAuthenticator builds on the foundations of Fortinet Single Sign-on, adding a greater range of user identification methods and greater scalability. FortiAuthenticator is the gatekeeper of authorization into the Fortinet secured enterprise network identifying users, querying access permissions from third party systems and communicating this information to FortiGate devices for use in Identity-Based Policies.

FortiAuthenticator delivers transparent identification via a wide range of methods:

- Polling of an Active Directory Domain Controller;
- Integration with FortiAuthenticator Single Sign-On Mobility Agent which detects login, IP address changes and logout;
- FSSO Portal based authentication with tracking widgets to reduce the need for repeated authentications;
- Monitoring of RADIUS Accounting Start records.

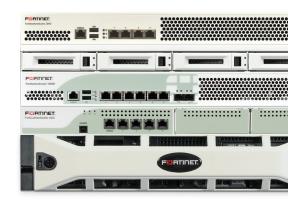

FortiAuthenticator FSSO Features

- Enables identity and role-based security policies in the Fortinet secured enterprise network without the need for additional authentication through integration with Active Directory
- Strengthens enterprise security by simplifying and centralizing the management of user identity information

Additional FortiAuthenticator Features

- Secure Two-factor / OTP Authentication with full support for FortiToken
- RADIUS and LDAP Authentication
- Certificate management for enterprise VPN deployment
- IEEE802.1X support for wired and wireless network security

Key Features & Benefits


FSSO Transparent User Identification	Zero impact for enterprise users.
Integration with LDAP and AD for	Utilizes existing systems for network authorization information, reducing deployment times and
group membership	streamlining management processes. Integration with existing procedures for user management.
Wide range of user identification methods	Flexible user identification methods for integration with the most diverse of enterprise environments.
Enablement of identity and	Allows security administrator to give users access to the relevant network and application resources
role-based security	appropriate to their role. while retaining control and minimizing risk.






FortiAuthenticator Single Sign-On User Identification Methods


FortiAuthenticator can identify users through a varied range of methods and integrate with third party LDAP or Active Directory systems to apply group or role data to the user and communicate with FortiGate for use in Identity based policies. FortiAuthenticator is completely flexible and can utilize these methods in combination. For example, in a large enterprise, AD polling or FortiAuthenticator SSO Mobility Agent may be chosen as the primary method for transparent authentication with fallback to the portal for non-domain systems or guest users.

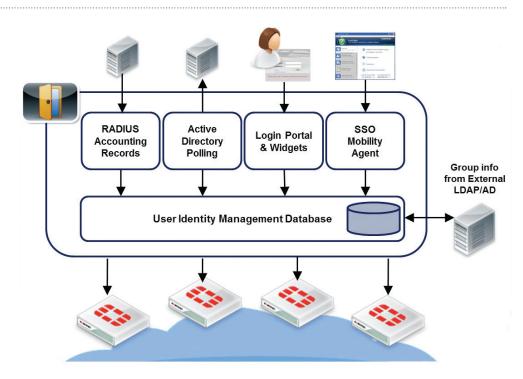

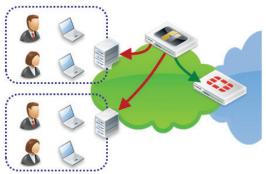


Active Directory Polling

User authentication into active directory is detected by regularly polling domain controllers. When a user login is detected, the username, IP and group details are entered into the FortiAuthenticator User Identity Management Database and according to the local policy, can be shared with multiple FortiGate devices.

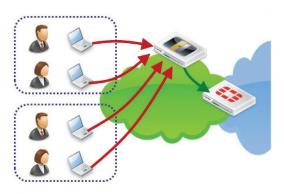

FortiAuthenticator SSO Mobility Agent


For complicated distributed domain architectures where polling of domain controllers is not feasible or desired, an alternative is the FortiAuthenticator SSO Client. Distributed as part of FortiClient or as a standalone installation for Windows PCs, the client communicates login, IP stack changes (Wired > Wireless, wireless network roaming) and logout events to the FortiAuthenticator, removing the need for polling methods.

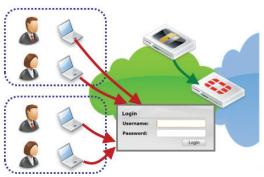

FortiAuthenticator Portal and Widgets

For systems which do not support AD polling or where a client is not feasible, FortiAuthenticator provides an explicit authentication portal. This allows the users to manually authenticate to the FortiAuthenticator and subsequently into the network. To minimize the impact of repeated logins required for manual authentication, a set of widgets is provided for embedding into an organization's intranet which automatically logs the users in through the use of browser cookies whenever they access the intranet homepage.

HIGHLIGHTS

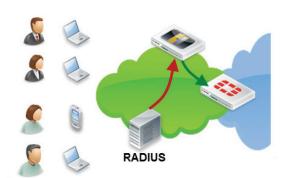

RADIUS Accounting Login

In a network which utilizes RADIUS authentication (e.g. wireless or VPN authentication), RADIUS Accounting can be used as a user identification method. This information is used to trigger user login and to provide IP and group information, removing the need for a second tier of authentication.

Additional Functionality

Strong User Identity with Two-factor Authentication

FortiAuthenticator extends two-factor authentication capability to multiple FortiGate appliances and to third party solutions that support RADIUS or LDAP authentication. User identity information from FortiAuthenticator combined with authentication information from FortiToken ensures that only authorized individuals are granted access to your organization's sensitive information. This additional layer of security greatly reduces the possibility of data leaks while helping companies meet audit requirements associated with government and business privacy regulations. FortiAuthenticator supports the widest range of tokens possible to suit your user requirements. With the physical time based FortiToken-200, FortiToken Mobile (for iOS and Android), e-mail and SMS tokens, FortiAuthenticator has a token options for all users and scenarios. Two-factor authentication can be used to control access to applications such as FortiGate management, SSL and IPSEC VPN, Wireless Captive Portal login and third party, RADIUS compliant networking equipment.

To streamline local user management, FortiAuthenticator includes user self-registration and password recovery features.

Enterprise Certificate Based VPNs

Site-to-site VPNs often provide access direct to the heart of the enterprise network from many remote locations. Often these VPNs are secured simply by a preshared key, which, if compromised, could give access to the whole network. FortiOS support certificate-based VPNs; however, use of certificate secured VPNs has been limited, primarily due to the overhead and complexity introduced by certificate management. FortiAuthenticator removes this overhead involved by streamlining the bulk deployment of certificates for VPN use in a FortiGate environment by cooperating with FortiManager for the configuration and automating the secure certificate delivery via the SCEP protocol.

For client-based certificate VPNs, certificates can be created and stored on the FortiToken300 USB Certificate store. This secure, pin protected certificate store is compatible with FortiClient and can be used to enhance the security of client VPN connections in conjunction with FortiAuthenticator.

Additional Features & Benefits

RADIUS and LDAP User Authentication	Local Authentication database with RADIUS and LDAP interfaces centralizes user management.
Wide Range of Strong Authentication Methods	Strong authentication provided by FortiAuthenticator via hardware tokens, e-mail, SMS, e-mail and digital certificates help to enhance password security and mitigate the risk of password disclosure, replay or brute forcing.
User Self-registration and Password Recovery	Reduces the need for administrator intervention by allowing the user to perform their own registration and resolve their own password issues, which also improves user satisfaction.
Integration with Active Directory and LDAP	Integration with existing directory simplifies deployment, speeds up installation times and reutilizes existing development.
Certificate Management	Streamlined certificate management enables rapid, cost-effective deployment of certificate-based authentication methods such as VPN.
802.1X Authentication	Deliver enterprise port access control to validate users connection to the LAN and Wireless LAN to prevent unauthorized access to the network.

SPECIFICATIONS

Martina		FORTIAUTHENTICATOR-200D	FORTIAUTHENTICATOR-400C	FORTIAUTHENTICATOR-1000D	FORTIAUTHENTICATOR-3000D
SPF Interfaces	Hardware				
SPH bedrings	10/100/1000 Interfaces (Copper, RJ-45)	4	4	4	4
Signe - Sig	SFP Interfaces	0	0	2	2
Signe - Sig	Local Storage	1x 1 TB Hard Disk Drive	1x 1 TB Hard Disk Drive	2x 2 TB Hard Disk Drive	2x 2 TB Hard Disk Drive
Total Linear Amende 100			0 0	0 0	
March Marc	System Performance				
March Marc	Total Users (Local + Remote)	500	2,000	10,000	40,000
User Coruys	FortiTokens	500	2,000	10,000	40,000
User Coruys	RADIUS Clients (NAS Devices)	50	200	1,000	4,000
Content Cont	User Groups		50	2.000	
Dimensions					
Dimensions					
Height x Width x Length (mm)		2,000	10,000	00,000	200,000
Height x Width x Longth (mm)		1.017.110.0 %	4.7474440.5	0.547.044.5.5-	0.517.507.5.1-
Process					
Paid Mountaile File Rack Mountaile File Fil					
Power Source	Weight	23 lbs (10.43 kg)	23 lbs (10.43 kg)	30.6 lbs (13.9 kg)	55.3 lbs (25.1 kg)
Power Source	Environment				
Current (Max) 2.004/110/,14/220V 4./110/,24/220V 54/110/,34/220V 104/110/,54/220V Power Consumption (WG) 60 W 100 W 133 W 317 W Heat Dissipation 205 BTU/h 411 BTU/h 548 BTU/h 102 BTU/h Operating Temperature 292-104F (0-40°C) 32-104F (0-40°C) 32-104F (0-40°C) 40-149F (0-40°C) 50-95F (10-35°C) Storage Temperature 13-159F (25-70°C) -13-159F (25-70°C) -13-159F (25-70°C) 40-149F (40-40°C) <	Form Factor	Rack Mountable (1RU)	Rack Mountable (1RU)	Rack Mountable (2 RU)	Rack Mountable (2 RU)
Power Consumption (AVC) 60 W 100 W 133 W 137 W Heat Dissipation 205 BIU/h 411 BIU/h 546 BIU/h 1082 BIU/h 600 Pertaing Temperature 32-104 F (0-40°C) 32-104 F (0-40°C) 0-95°F (10-36°C) 500 rage Temperature 13-159F (25-70°C) -13-159F (25-70°C) -40-149°F (40-45°C) -40-149°F (40-45°C) 400 -149°F (40-45°C) -40-149°F (40-45°C) -40-149°F (40-45°C) 400 -149°F (25-70°C) -13-159F (25-70°C) -40-149°F (40-45°C) -40-149°F (40-45°C) 400 -149°F (40-45°C) -40-149°F (40-45°C) -40-149°F (40-45°C) 400 -149°F (25-70°C) -13-159°F (25-70°C) -40-149°F (40-45°C) -40-149°F (40-45°C) 400 -149°F (40-45°C) -40-149°F (40-45°C) -40-149°F (40-45°C) -40-149°F (40-45°C) 400 -140°F (25-70°C) -40-149°F (40-45°C) -40-149°F (40-45°C) -40-149°F (40-45°C) 400 -140°F (25-70°C) -40-149°F (40-45°C) -40-149°F (40-45°C) -40-149°F (40-45°C) 400 -140°F (25-70°C) -40-149°F (40-45°C) -40-149°F (40-45°C) -40-149°F (40-45°C) 400 -140°F (25-70°C) -40-149°F (40-45°C) -40-149°F (40-45°C) -40-149°F (40-45°C) 400 -140°F (25-70°C) -40-149°F (40-45°C) -40-149°F (40-45°C) -40-149°F (40-45°C) 400 -140°F (25-70°C) -40-149°F (40-45°C) -40-149°F (40-4	Power Source	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz
Near Dissipation 205 BTU/h 411 BTU/h 546 BTU/h 1082 BTU/h 10perature 32-104*F (0-40*C) 32-104*F (0-40*C) 50-39*F (10-30*C) 50	Current (Max)	2.00A /110V, 1A /220V	4A /110V, 2A /220V	5A /110V, 3A /220V	10A /110V, 5A /220V
Operating Temperature 32-104°F (0-40°C) 32-104°F (0-40°C) 42-104°F (0-40°C) 40-149°F (40-65°C) 40-149	Power Consumption (AVG)	60 W	100 W	133 W	317 W
Operating Temperature 32-104°F (0-40°C) 32-104°F (0-40°C) 42-104°F (0-40°C) 40-149°F (40-65°C) 40-149	Heat Dissipation	205 BTU/h	411 BTU/h	546 BTU/h	1082 BTU/h
Storage Temperature					
### Note					
Standards Supported 10/100/1000 Base-TX (GbE), 1000, IP, Telnet, HTTP 1.0/1.1, SSL, RS232, NTP Client (RFC1305), RADIUS (RFC2865), LDAP (RFC2560), EAP-TLS (RFC275)) (PRC2871) (PRC28711) (PRC2871)					
Standards Supported 10/100/1000 Base-TX (GbE), 1000, IP, Telnet, HTTP 1.0/1.1, SSL, RS232, NTP Client (RFC1305), RADIUS (RFC2865), LDAP (RFC2560), EAP-TLS (RFC275)) (PRC2871) (PRC28711) (PRC2871)	System				
Cartificate Revocation (RFC2380), PKCS#12 Cartificate Import, PKCS#10 CSR Import (RFC2986), Online Cartificate Status Protocol (RFC 2560), EAP-TLS (RFC27' Simple Cartificate Erroriment Protocol (SCEP) Management	•	10/100/1000 Rase-TX (GhF) 1000	IP Telnet HTTP 1 0/1 1 SSI RS232 NTI	P. Client (REC1305) RADIUS (REC2865) L	DAP (REC4510) v 509 (REC5280)
Safety FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FAC-VM-10000-U6 FAC-VM-10000-U	otanuarus supporteu	Certificate Revocation (RFC3280), PK	CS#12 Certificate Import, PKCS#10 CSR In		
Safety FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB FCC Part 15 Class A, C-Tick, VCCI, CE, BMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CE, BSMI, KC, UL/cUL, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CB, GOST FCC Part 15 Class A, C-Tick, VCCI, CB, GOST FCC Part 15	Management		CL1, Direct Con:	sole DB9 CLI, HTTPS	
VIRTUAL APPLIANCES FAC-VM BASE FAC-VM-100-UG FAC-VM-1000-UG FAC-VM-1000-UG FAC-VM-10000-UG +100000-UG +100000-UG +10000-UG +100	Compliance				
Capacity Local Users 100 +100 +1000 +10000 +100000 Remote Users 100 +100 +1000 +10000 +100000 FortiTokens 200 +200 +2000 +20000 +200000 NAS Devices 10 +10 +100 +1000 +10000 +10000 User Groups 10 +10 +100 +1000 +10000 +10000 CA Certificates 5 +5 +50 +500 +500 +5000 User Certificates 100 +100 +1000 +10000 +10000 +10000 +10000 +10000 +100000 +100000 +100000 +100000 +100000 +100000 +100000 +100000 +100000 +1000000 +100000	Safety				
Cocal Users 100	VIRTUAL APPLIANCES	FAC-VM BASE	FAC-VM-100-UG FAC-VM-	1000-UG FAC-VM-10000-L	IG FAC-VM-100000-UG
Remote Users 100 +100 +1000 +10000 +100000 FortiTokens 200 +2000 +20000 +200000 +200000 NAS Devices 10 +10 +100 +1000 +10000 User Groups 10 +10 +100 +1000 +10000 CA Certificates 5 +5 +50 +500 +500 User Certificates 100 +100 +1000 +10000 +10000 Virtual Machine Wyervisors Supported Vyware ESXI7 ESX 3.5 / 4.0 / 4.1 / 5.0 Virtual Machine Form Factor Open Virtualization Format (OVF) Max Virtual CPUs Supported Unlimited Virtual Machine Storage Required (60 GB / 2 TB) Virtual Machine Memory Required (Min/Max) (51 MB / 4.096 MB)	Capacity				
Remote Users 100 +100 +1000 +10000 +100000 FortiTokens 200 +200 +2000 +20000 +200000 NAS Devices 10 +10 +100 +1000 +10000 +10000 User Groups 10 +10 +100 +1000 +10000 +500 +500 CA Certificates 5 +5 +50 +500 +500 +500 User Certificates 100 +1000 +1000 +10000 +10000 +100000 Virtual Machine Wirtual Machine (Open Virtualization Format (OVF) Max Virtual CPUs Supported Unlimited Unlimited Virtual Machine Storage Required 60 GB / 2 TB Virtual Machine Memory Required (Min/Max) 612 MB / 4 096 MB	Local Users	(100)			
NAS Devices 10 +10 +100 +1000 +10000 User Groups 10 +10 +100 +1000 +10000 CA Certificates 5 +5 +50 +500 +500 User Certificates 100 +1000 +1000 +10000 +100000 Virtual Machine Hypervisors Supported VMware ESXI / ESX 3.5 / 4.0 / 4.1 / 5.0 Virtual Machine Form Factor Open Virtualization Format (OVF) Virtual Machine Form Factor Unlimited Virtual NICs Required (Min/Max) 1 / 4 Virtual Machine Storage Required 60 GB / 2 TB Virtual Machine Memory Required (Min/Max) 512 MB / 4.096 MB		(100)			
NAS Devices 10 +10 +100 +1000 +10000 User Groups 10 +10 +100 +1000 +10000 CA Certificates 5 +5 +50 +500 +500 User Certificates 100 +1000 +1000 +10000 +100000 Virtual Machine Hypervisors Supported VMware ESXI / ESX 3.5 / 4.0 / 4.1 / 5.0 Virtual Machine Form Factor Open Virtualization Format (OVF) Virtual Machine Form Factor Unlimited Virtual NICs Required (Min/Max) 1 / 4 Virtual Machine Storage Required 60 GB / 2 TB Virtual Machine Memory Required (Min/Max) 512 MB / 4.096 MB	FortiTokens	200	+200 +2000	+20000 +20000	<u>+200000</u>
User Groups 10 +10 +100 +1000 +10000 CA Certificates 5 +5 +50 +500 +500 User Certificates 100 +1000 +10000 +10000 +100000 Virtual Machine Hypervisors Supported VMware ESXI / ESX 3.5 / 4.0 / 4.1 / 5.0 Virtual Machine Form Factor Open Virtualization Format (OVF) Max Virtual CPUs Supported Unlimited Virtual Machine Good (Min/Max) 1 / 4 Virtual Machine Storage Required 60 GB / 2 TB Virtual Machine Memory Required (Min/Max) 512 MB / 4.096 MB	······································				······
CA Certificates 5 +5 +50 +500 +500 User Certificates 100 +100 +1000 +10000 +10000 Virtual Machine Www.e ESXI / ESX 3.5 / 4.0 / 4.1 / 5.0 Virtual Machine Form Factor Open Virtualization Format (OVF) Max Virtual CPUs Supported Unlimited Virtual NICs Required (Min/Max) 1 / 4 Virtual Machine Storage Required 60 GB / 2 TB Virtual Machine Memory Required (Min/Max) 512 MB / 4.096 MB	······		·		
User Certificates 100 +100 +1000 +10000 +100000 Virtual Machine Www.ee ESXI / ESX 3.5 / 4.0 / 4.1 / 5.0 Virtual Machine Form Factor Open Virtualization Format (OVF) Max Virtual CPUs Supported Unlimited Virtual NICs Required (Min/Max) 1 / 4 Virtual Machine Storage Required 60 GB / 2 TB Virtual Machine Memory Required (Min/Max) 512 MB / 4.096 MB			······································	······	
Hypervisors Supported VMware ESXI / ESX 3.5 / 4.0 / 4.1 / 5.0 Virtual Machine Form Factor Open Virtualization Format (OVF) Max Virtual CPUs Supported Unlimited Virtual NICs Required (Min/Max) 1 / 4 Virtual Machine Storage Required 60 GB / 2 TB Virtual Machine Memory Required (Min/Max) 512 MB / 4.096 MB	······································	······			
Hypervisors Supported Virtual Machine Form Factor Open Virtualization Format (OVF) Max Virtual CPUs Supported Unlimited Virtual NICs Required (Min/Max) (I / 4) Virtual Machine Storage Required Virtual Machine Memory Required (Min/Max) (512 MB / 4,096 MB)	Virtual Machine				
Virtual Machine Form Factor Max Virtual CPUs Supported (Unlimited) Virtual NICs Required (Min/Max) (1/4) Virtual Machine Storage Required (60 GB / 2 TB) Virtual Machine Memory Required (Min/Max) (512 MB / 4,096 MB)			VMware ESXi /	FSX 3.5 / 4.0 / 4.1 / 5.0	
Max Virtual CPUs Supported Unlimited Virtual NICs Required (Min/Max) 1/4 Virtual Machine Storage Required 60 GB / 2 TB Virtual Machine Memory Required (Min/Max) 512 MB / 4,096 MB			······································		
Virtual NICs Required (Min/Max) (1/4) Virtual Machine Storage Required (60 GB / 2 TB) Virtual Machine Memory Required (Min/Max) 512 MB / 4,096 MB			Open virtus		
Virtual Machine Storage Required (60 GB / 2 TB) Virtual Machine Memory Required (Min/Max) 512 MB / 4,096 MB	······································	······································			
Virtual Machine Memory Required (Min/Max) (512 MB / 4,096 MB)	<u></u>	······································			
<u></u>	······································				
	Virtual Machine Memory Required (Min/Max) High Availability Support		(512)	VB / 4,096 MB)	







FortiAuthenticator-400C





FortiAuthenticator-3000D

FortiAuthenticator Virtual Appliance

ORDERING INFORMATION

SKU	Description
FAC-200D	FortiAuthenticator-200D, 4x 10/100/1000 ports, 1x 1 TB HDD
FAC-400C	FortiAuthenticator-400C, 4x 10/100/1000 ports, 1x 1 TB HDD
FAC-1000D-E07S	FortiAuthenticator-1000D, 4x 10/100/1000 ports, 2x SFP interfaces, 2x 2 TB HDD
FAC-3000D	FortiAuthenticator-3000D, 4x 10/100/1000 ports, 2x SFP interfaces, 2x 2 TB HDD
FAC-VM-Base	Base FortiAuthenticator-VM with 100 user license. Unlimited vCPU
FAC-VM-100-UG	FortiAuthenticator-VM with 100 user license upgrade
FAC-VM-1000-UG	FortiAuthenticator-VM with 1000 user license upgrade
FAC-VM-10000-UG	FortiAuthenticator-VM with 10,000 user license upgrade
FAC-VM-100000-UG	FortiAuthenticator-VM with 100,000 user license upgrade
FC1-10-0ACVM-248-02-12	1 Year 24x7 FortiCare Contract (1–500 users)
FC2-10-0ACVM-248-02-12	1 Year 24x7 FortiCare Contract (1–1100 users)
FC3-10-0ACVM-248-02-12	1 Year 24x7 FortiCare Contract (1–5100 users)
FC4-10-0ACVM-248-02-12	1 Year 24x7 FortiCare Contract (1–10100 users)
FC5-10-0ACVM-248-02-12	1 Year 24x7 FortiCare Contract (1–50100 users)
FC6-10-0ACVM-248-02-12	1 Year 24x7 FortiCare Contract (1–100100 users)



GLOBAL HEADQUARTERS EMEA SALES OFFICE

Fortinet Inc. 1090 Kifer Road Sunnyvale, CA 94086 **United States** Tel: +1.408.235.7700 Fax: +1.408.235.7737

120 rue Albert Caquot 06560, Sophia Antipolis, France Tel: +33.4.8987.0510

Fax: +33.4.8987.0501

APAC SALES OFFICE

300 Beach Road #20-01 The Concourse Singapore 199555 Tel: +65.6513.3730 Fax: +65.6223.6784

LATIN AMERICA SALES OFFICE

Prol. Paseo de la Reforma 115 Int. 702 Col. Lomas de Santa Fe, C.P. 01219 Del. Alvaro Obregón México D.F. Tel: 011-52-(55) 5524-8480

Copyright © 2013 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, and FortiGuard®, are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance metrics contained herein were attained in internal lab tests under ideal conditions, and performance may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to the performance metrics herein. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any guarantees. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable. Certain Fortinet products are licensed under U.S. Patent No. 5,623,600.

FST-PROD-DS-FAUIM FAC-DAT-R7-201312



Fortinet Product Matrix

產品	效能	Description	作業版本
FG-FW-Base Fortinet 網路防火牆 500Mbps	網路防火牆 500Mbps		Vmware Hyper-V Citrix Xen OpenXen KVM AWS
FG-FW-1000-UG Fortinet 網路防火牆 頻寬升級 1Gbps	網路防火牆 頻寬升級 1Gbps	提供防火牆控管存取政策,使用者身份辨識,IPSEC VPN, SSL VPN,SLB(主機負載平衡)及 無線網路控制器 (Wireless Controller)	
FG-VM01/VM02/VM04/VM08 Fortinet 網路防火牆 (授權方式:依照 CPU 數量 1/2/4/8 四個 授權方式出貨)	網路防火牆 支援 1 CPU	(Hacasa Collabata)	
FG-NGFW-Base Fortinet 新世代網路防火牆 500Mbps (含 FW, IPS, Application Control, AV, Web Filtering and Antispam)	新世代網路防火牆 500Mbps		
FG-NGFW-1000-UG Fortinet 新世代網路防火牆 頻寬升級 1Gbps (含 FW, IPS, Application Control, AV, Web Filtering and Antispam)	新世代網路防火牆 頻寬升級 1Gbps	提供防火牆控管存取政策,使用者身份辨識,IPSEC VPN, SSL VPN,SLB(主機負載平衡),無線網路控制器 (Wireless Controller),入侵防禦,應用程式控管,防毒, 不當網頁過濾,防垃圾郵件	Vmware Hyper-V Citrix Xen OpenXen KVM AWS
FG-VM01/VM02/VM04/VM08 Fortinet 新世代網路防火牆 500Mbps (含 FW, IPS, Application Control, AV, Web Filtering and Antispam) (授權方式:依照 CPU 數量 1/2/4/8 四個 授權方式出貨)	新世代網路防火牆 支援 1 CPU		
FMG-VM-Base Fortinet 集中管理系統	集中管理系統 10 台設備	Fortinet 防火牆管理,設定和集中派送(政策,資安防禦 資料庫)的中央管理系統 r, 支援 10 台設備	Vmware Hyper-V AWS
FMG-VM-10-UG Fortinet 集中管理系統	集中管理平台設備 數量升級 - 10 台設備		
FAZ-VM-BASEFortinet 集中日誌報表系統	集中日誌報表系統		Vmware Hyper-V AWS
FAZ-VM-GB1 Fortinet 集中日誌報表系統 紀錄數量升級 - 1 GB/Day	集中日誌報表系統 紀錄數量升級 - 1 GB/Day	Fortinet 防火牆的集中日誌報表管理系統	
FSA-VM Fortinet 先進威脅防護系統 (ATP)	先進威脅防護系統 (ATP)	即時執行沙箱檢測,提供虛擬的運行環境來分析高風險或可疑的程式,研判威脅完整的生命周期,協助用戶智慧地立即偵測出既存與新興的網路威脅。	VMware



	<u> </u>		
FWB-Base Fortinet 網站應用程式防火牆(WAF) 25Mbps	網站應用程式防火牆(WAF) 25Mbps		Vmware Hyper-V Citrix Xen Open Xen AWS
FWB-100-UG Fortinet 網站應用程式防火牆(WAF) 頻寬升級 100Mbps	Mg 見、ナナ級X IUUIVIDDS	提供網站應用程式防火牆功能(WAF),網頁防置換,網頁自動備份及回復等功能	
FWB-VM01/VM02/VM04/VM08 Fortinet 網站應用程式防火牆(WAF) (授權方式:依照 CPU 數量 1/2/4/8 四個 授權方式出貨)	網站應用程式防火牆(WAF) 支援 1 CPU		
FAD-Base Fortinet 主機負載平衡系統 (SLB) 1Gbps	主機負載平衡系統(SLB) 1Gbps		VMware
FAD-1000-UG Fortinet 主機負載平衡系統 (SLB) 頻寬升級 1Gbps	主機負載平衡系統(SLB) 頻寬升級 1Gbps	支援網路的主機負載平衡,全球服務負載平衡(GSLB) 及線路負載平衡(LLB)等功能	
FAD-VM01/VM02/VM04/VM08 Fortinet 主機負載平衡系統(SLB) (授權方式:依照 CPU 數量 1/2/4/8 四個 授權方式出貨)	主機負載平衡系統(SLB) 支援 1 CPU		
FML-Base Fortinet 反垃圾郵件及郵件保全系統 100人版	反垃圾郵件及郵件保全系統 100人版		VMware Hyper-V Citrix Xen KVM
FML-300-UG Fortinet 反垃圾郵件及郵件保全系統 使用者數量升級 300人	反垃圾郵件及郵件保全系統 使用者數量升級 300 人	提供電子郵件主機功能、過濾並攔截垃圾郵件	
FML-VM01/VM02/VM04/VM08 Fortinet 反垃圾郵件及郵件保全系統 (授權方式: 依照 CPU 數量 1/2/4/8 四個 授權方式出貨)			
FAC-VM-Base Fortinet 身份認證系統 (Authenticator) 100 人版	身份認證系統(Authenticator) 100 人版	整合 RADIUS、LDAP 伺服器,提供標準及安全的雙因子	VMWare Hyper-V
FAC-VM-100-UGFortinet 身份認證系 統 (Authenticator) 使用者數量升級 100人	身份認證系統(Authenticator) 使用者數量升級 100人	認證	

